



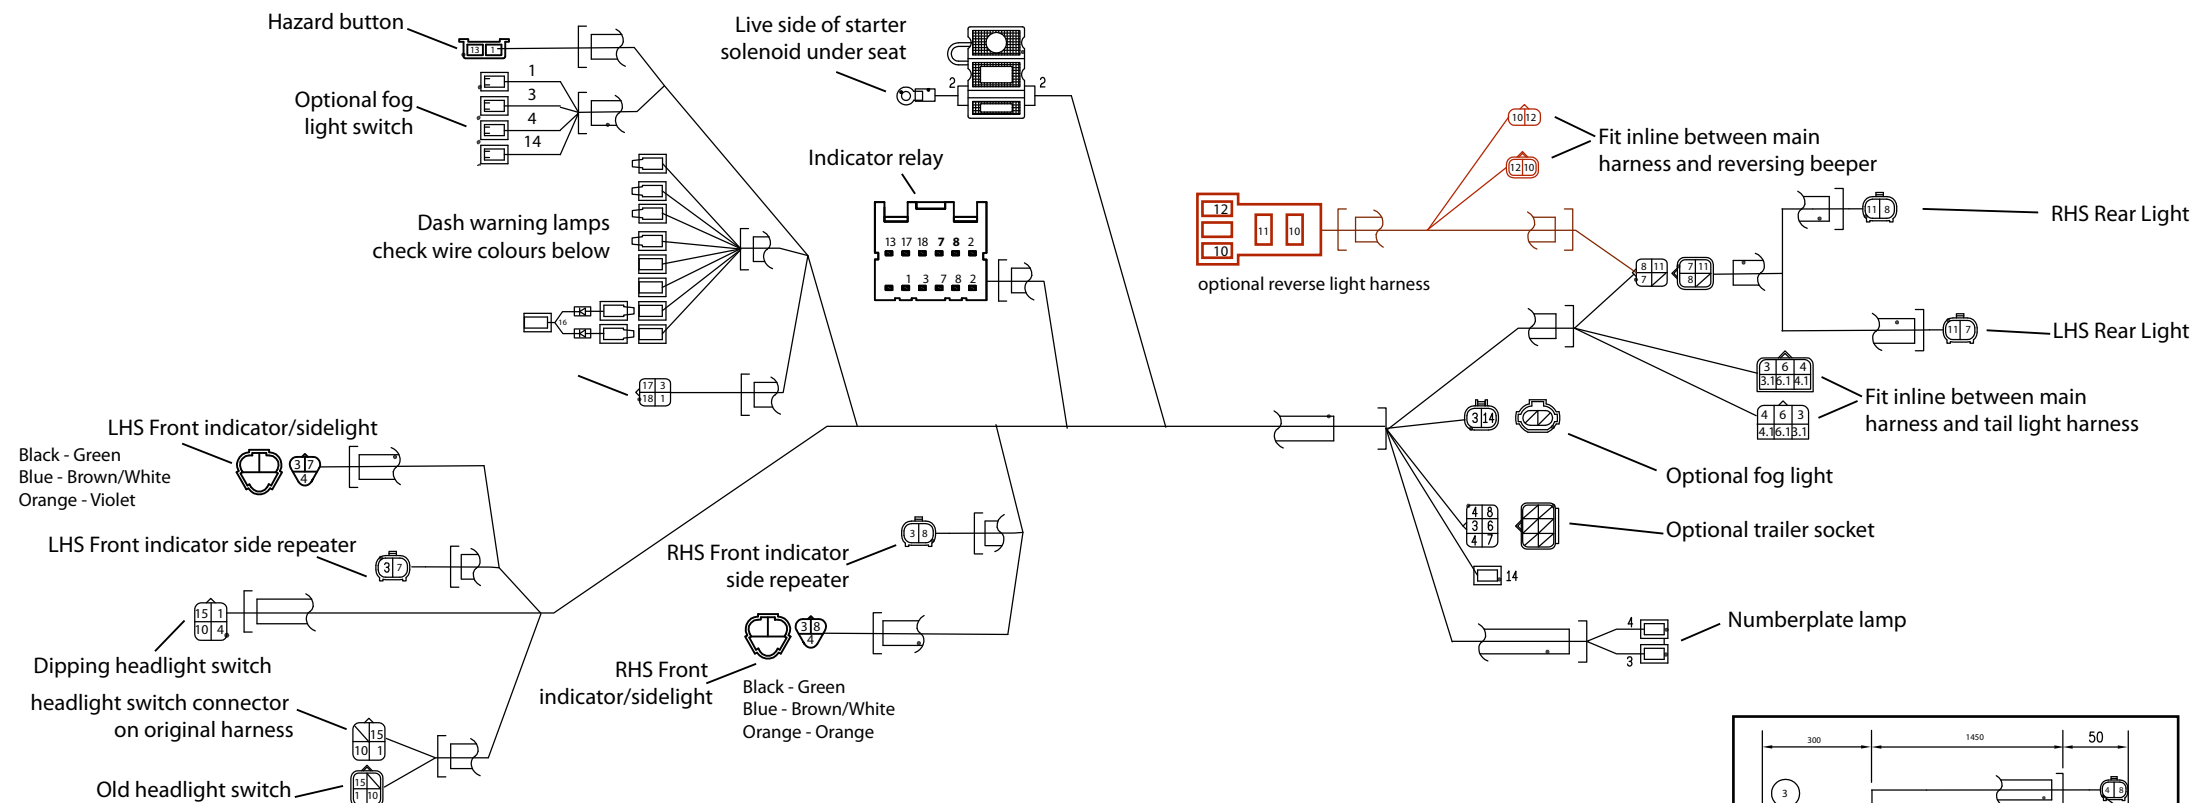


Wires AVS0.75F

1	Br	Switched
2	R	+ve
3	G	-ve
3.1	G/B	
4	Br/W	Side
4.1	Br/B	
5	L/B	High beam
6	G/Y	Brake
6.1	G/R	
7	V	Left Turn
8	O	Right Turn
10	W/B	Dip beam switch
11	Gr/R	Reverse
12	Gr	Reverse switch
13	Y/L	Hazard switch
14	R/B	Fog
15	L/Y	High beam switch
16	W	
17	V/R	Left turn switch
18	O/R	Right turn switch

supplied with dipping headlight conversion option



High beam relay - replace blanking plug open bonnet, taped to frame behind dash inline with steering wheel

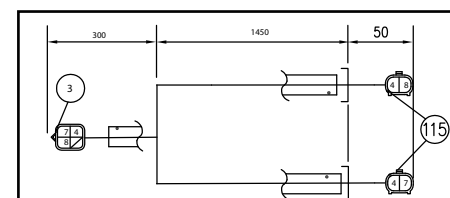

Dipping headlight cable harness, replace harness connecting to front headlights

supplied with dipping headlight conversion option

				QUADTECH WWW.QUADTECH.CO.UK				3D 7	KEY No. TA		
SPECIFICATION						SCALE	MATERIAL				WT.RTME
APPLICABLE DWG						Free	see Table				
						DRAWER	DESIGNED	D	CHECK	CHECK	APPR
								P			
						PART NAME					
											
	12 - 先行圖					HARNESS WIRE					
REVISION RECORD		DATE	DR	CK	CUSTOMER DWG NO.						
CUSTOMER PART NAME											
Honda Pioneer Lighting harness					QT-SXS-PIONEER-001 26/04/2017						